

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Aqueous

Industry: Transmission Repair

Segment: 01- Auto Maintenance

Soil: Shop dirt, oil, grease, silicone

Substrate: Aluminum, rubber, plastic, steel

Description of Part(s): End clutch cover

Customer objective: The customer was looking to improve their cleaning performance and automate their cleaning process.

Cleaner used: 10% by volume ArmaKleen™ 4 in 1 Cleaner

Machine used: Spray Washer (JRI TL3, JRI FL250, JRI FL500, Better Engineering G-2000)


Temperature used: 160°F

Time required: 30 minutes


Post Cleaning: Fresh water rinse followed by air pressure drying.

Recommendation to Customer: The ArmaKleen Technical Center recommended using 10% by volume ArmaKleen™ 4 in 1 Cleaner at 160°F in a Spray Washer for a minimum of 30 minutes.

Before Picture

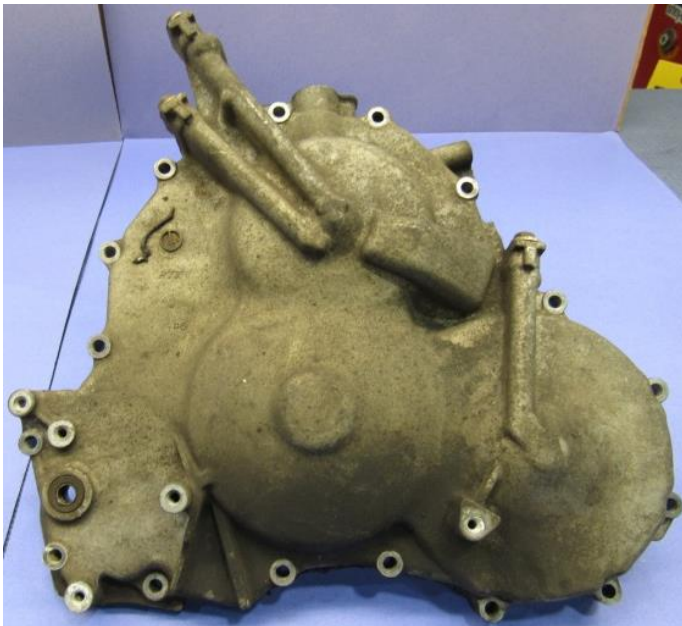

After Picture

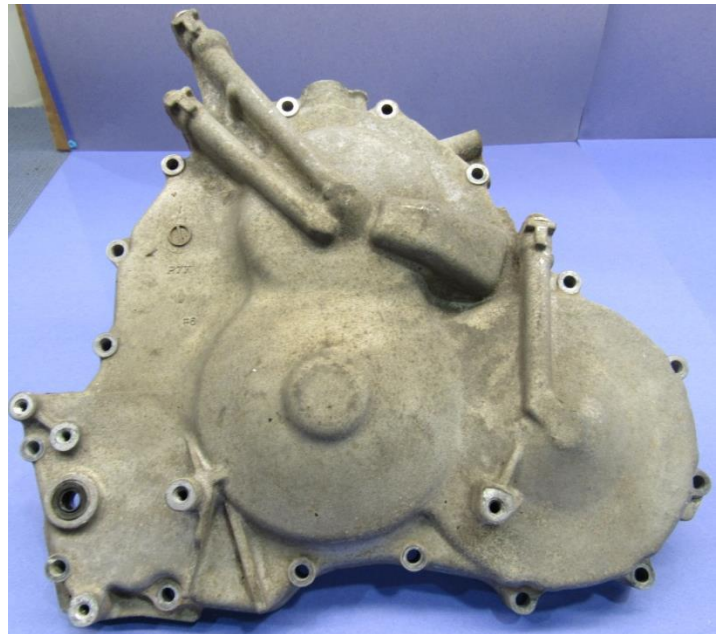

Source: TSR #15-A-245