

## ***ArmaKleen Technical Service Report Summary***

**Cleaning Trial Type:** Paint & Ink

**Industry:** Automotive parts manufacturer

**Segment:** 01 Auto Maintenance

**Soil:** gasket material

**Substrate:** Steel

**Description of Part(s):** a steel transmission valve-body plate

**Customer objective:** The customer was looking to improve their cleaning performance.

**Cleaner used:** 100% by volume solution of ArmaKleen™ Paint and Ink Remover

**Machine used:** Ultrasonic Washer (SK Blackstone 6315)


**Temperature used:** 160°F

**Time required:** 4 hours


**Post Cleaning:** Fresh water rinse followed by air pressure drying

**Recommendation to Customer:** The ArmaKleen Technical Center recommends using a 100% by volume solution of ArmaKleen™ Paint and Ink Remover at 160°F in an Ultrasonic Washer for a minimum of 4+ hours.

**Before Picture**

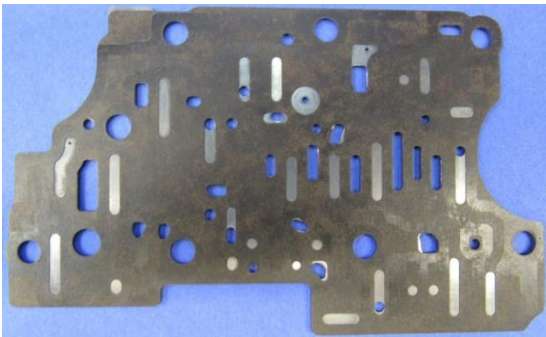

**After Picture**

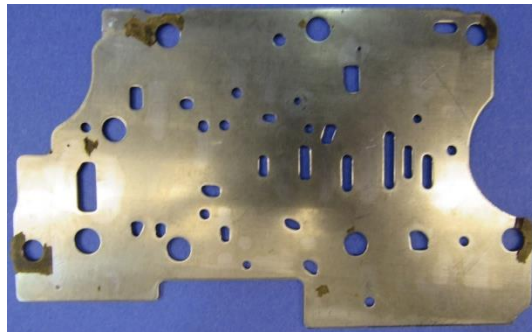

**Source:** TSR #16-P-042