

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Liquid Urethane Paint Removal

Industry: Automotive painting

Segment: 02 Auto Retail

Soil: Liquid urethane paint

Substrate: Steel

Description of Part(s): Bracket and eye-bolts

Customer objective: The customer was looking to improve their cleaning performance, automate their cleaning process, reduce their cleaning costs and to eliminate using an outside vendor for cleaning their parts.

Cleaner used: 100% by volume ArmaKleen™ Paint and Ink Remover

Machine used:

1. Spray Under Immersion Washer (Graymills T12, Graymills T24, SK 81.8 w/SUI)
2. Agitating Immersion Washer (SK 81.8, Graymills T12, Graymills T24)


Temperature used: 150°F

Time required: 1 to 2 hours

Post Cleaning: Fresh water rinse followed by air pressure drying.

Recommendation to Customer: The ArmaKleen Technical Center recommended using 100% by volume ArmaKleen™ Paint and Ink Remover at 150°F in either a Spray Under Immersion Washer or an Agitating Immersion Washer for a minimum of 1 to 2 hours.

Before Picture

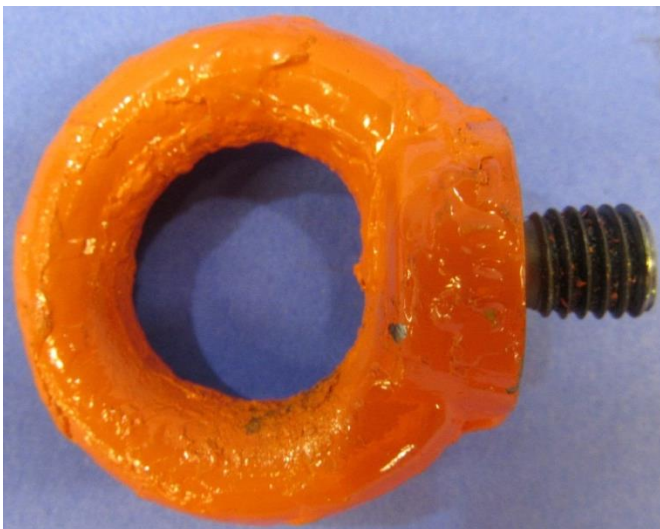

After Picture



Source: TSR #15-P-133