

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Paint & Ink

Industry: Gear Motor Manufacturer

Segment: 2 – Auto Retail

Soil: liquid urethane paint

Substrate: Rubber

Description of Part(s): Two new unsoiled rubber gaskets

Customer objective: The customer was looking to improve their cleaning performance, reduce rework and reject rate and reduce their cleaning costs.

Cleaner used: 100% by volume solution of ArmaKleen™ Paint and Ink Remover

Machine used: Spray Under Immersion Washer (Graymills T12, Graymills T24, SK Model 81.8 w/SUI)


Temperature used: 150°F

Time required: 0.5-1 hour


Post Cleaning: Fresh water rinse followed by air pressure drying.

Recommendation to Customer: The ArmaKleen Technical Center recommends using a 100% by volume solution of ArmaKleen™ Paint and Ink Remover at 150°F in a Spray-Under Immersion Washer for a minimum of 30 minutes to 1 hours

Before Picture

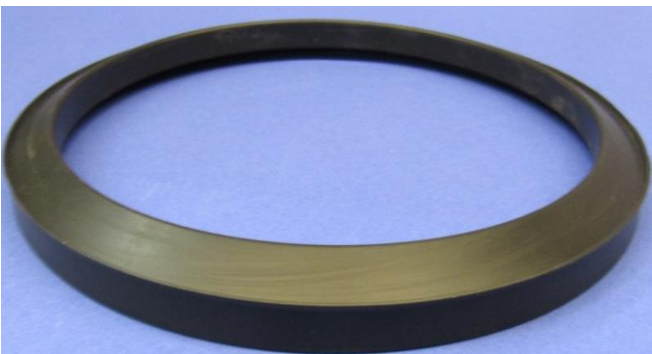

After Picture

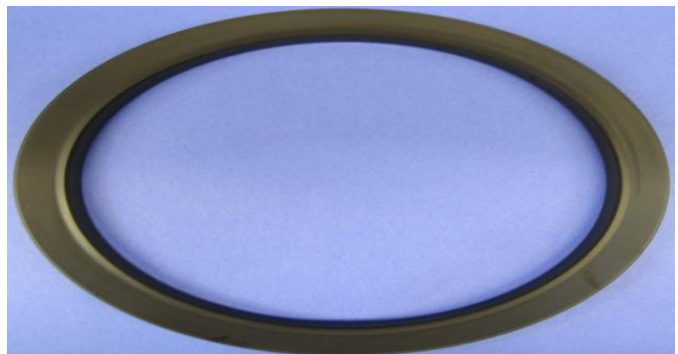

Source: TSR # 17-P-010