

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Paint & Ink

Industry: Automotive service

Segment: O2 – Auto Retail

Soil: epoxy powder coat paint

Substrate: Steel

Description of Part(s): two steel paint hooks

Customer objective: The customer was looking to improve their cleaning performance, automate their cleaning process and eliminate hazardous chemicals/waste.

Cleaner used: 100% by volume solution of ArmaKleen™ Paint and Ink Remover

Machine used:

- Ultrasonic Washer (SK Blackstone 6315)
- Spray Under Immersion Washer (Graymills T12, Graymills T24, SK Model 81.8 w/SUI)

Temperature used: 150°F – 160°F

Time required: 24+ hours


Post Cleaning: Fresh water rinse followed by air pressure drying

Recommendation to Customer: The ArmaKleen Technical Center recommends using a 100% by volume solution of ArmaKleen™ Paint and Ink Remover at 160°F in an Ultrasonic Washer for a minimum of 24+ hours or in a Spray-Under Immersion Washer at 150°F for a minimum of 24+ hours.

Before Picture



After Picture

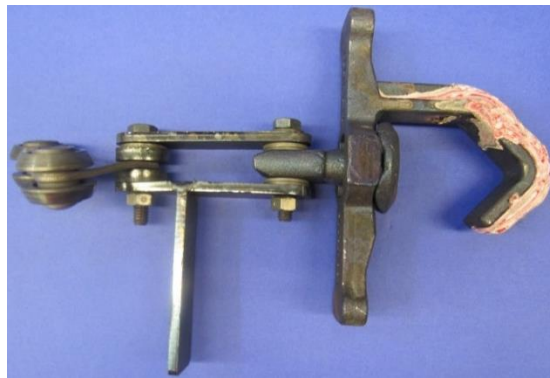

Source: TSR #17-P-159