

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Paint & Ink

Industry: Automobile Manufacturer

Segment: 03 – Dealerships – Auto

Soil: grease and an unknown glue/adhesive

Substrate: Stainless Steel

Description of Part(s): two stainless steel injectors

Customer objective: The customer was looking to improve their cleaning performance, automate their cleaning process and reduce rework and reject rate.

Cleaner used:

- 100% by volume solution of ArmaKleen™ Paint and Ink Remover
- 5% by volume solution of ArmaKleen™ 4 in 1 Cleaner

Machine used: Ultrasonic Washer (SK Blackstone 6315)


Temperature used: 160°F

Time required: 1 hour


Post Cleaning: Fresh water rinse followed by air pressure drying

Recommendation to Customer: The ArmaKleen Technical Center recommends using a 100% by volume solution of ArmaKleen™ Paint and Ink Remover at 160°F in an Ultrasonic Washer for a minimum of 1 hour.

Before Picture

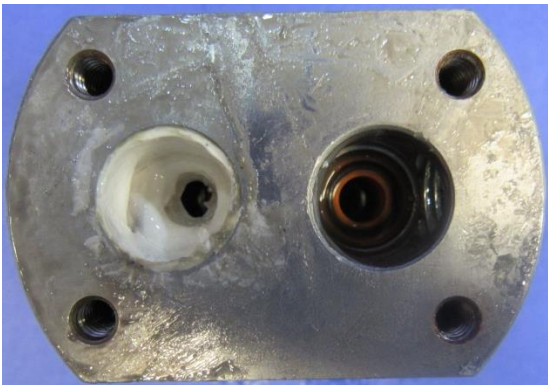

After Picture

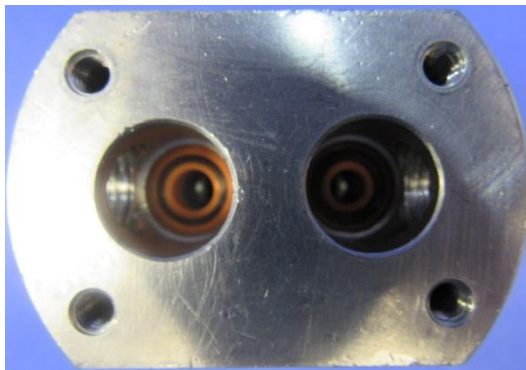

Source: TSR #17-P-144