

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Aqueous

Industry: Diesel repair

Segment: 04-Dealerships – Recreational & Machinery

Soil: Grease, rust

Substrate: Steel

Description of Part(s): Frames

Customer objective: The customer was looking to improve their cleaning performance, automate their cleaning process and reduce rework and reject rate.

Cleaner used: 10% by volume ArmaKleen™ Rust Remover

Machine used: Agitating Immersion Washer (SK 81.8, Graymills T12, Graymills T24)

Temperature used: 150°F

Time required: 2 to 4 hours


Post Cleaning: Fresh water rinse followed by air pressure drying.

Recommendation to Customer: The ArmaKleen Technical Center recommended using 10% by volume ArmaKleen™ Rust Remover at 150°F in an Agitating Immersion Washer for a minimum of 2 to 4 hours.

Before Picture



After Picture

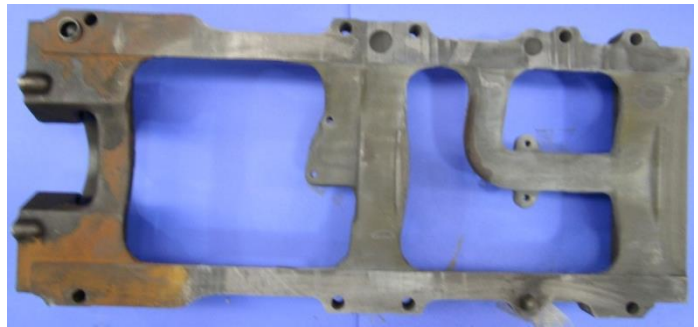

Source: TSR #15-A-217