

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Waterproofing removal

Industry: Coating application

Segment: 21 – Chemical Manufacturing

Soil: Tuff-N Dri HS Waterproofing

Substrate: Stainless steel

Description of Part(s): 27.5" x 7.5" stainless steel filter screen

Customer objective: The customer was looking to automate their cleaning process and eliminate hazardous chemicals and waste.

Cleaner used: 100% by volume ArmaKleen™ Paint and Ink Remover

Machine used: Spray Under Immersion Washer (T12, T24, 40.1, 81.8 w/ SUI)

Temperature used: 160°F

Time required: 24 hours


Post Cleaning: Fresh water rinse followed by air pressure drying.

Recommendation to Customer: The ArmaKleen Technical Center recommended using 100% by volume ArmaKleen™ Paint and Ink Remover at 160°F in a Spray Under Immersion Washer for a minimum of 24 hours.

Before Picture



After Picture

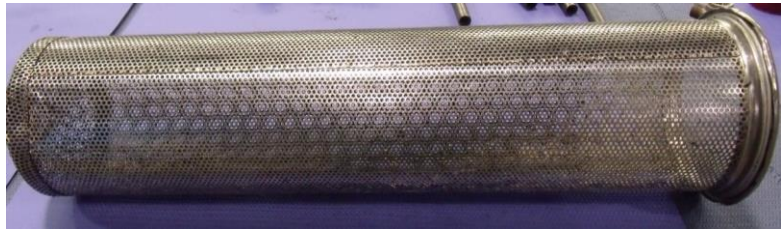

Source: TSR #13-P-020