

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Polymer coating removal

Industry: Chemical supplier

Segment: 21 – Chemical Manufacturing

Soil: Vibrathane 8526, Vibrathane B821

Substrate: Aluminum

Description of Part(s): Plaquettes and a bar

Customer objective: The customer was looking to improve their cleaning performance and automate their cleaning process.

Cleaner used: 100% by volume ArmaKleen™ Paint and Ink Remover

Machine used: Spray Under Immersion (Graymills T12, Graymills T24, SK 81.8 w/SUI)


Temperature used: 150°F

Time required: 4 hours

Post Cleaning: Fresh water rinse followed by air pressure drying. Several areas were brushed with a nylon bristle brush during the fresh water rinse.

Recommendation to Customer: The ArmaKleen Technical Center recommended using 100% by volume ArmaKleen™ Paint and Ink Remover at 150°F in a Spray Under Immersion Washer for a minimum of 4 hours.

Before Picture

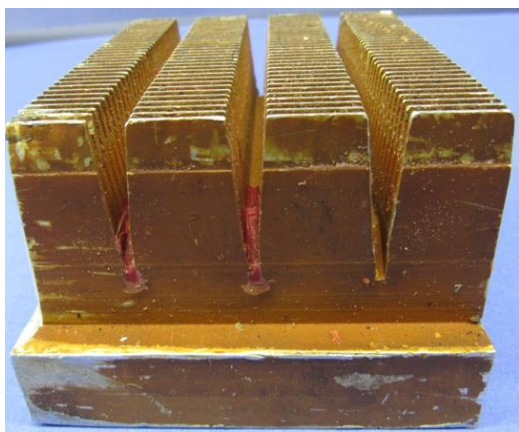

After Picture

