

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Aqueous and Paint & Ink

Industry: Oil refining

Segment: 21 – Chemical Manufacturing

Soil: Asphalt

Substrate: Steel, stainless steel

Description of Part(s): Connectors/dispensers

Customer objective: Improve cleaning performance, reduce rework and reject rate, and reduce cleaning costs

Cleaner used:

- 100% by volume solution of ArmaKleen™ Paint & Ink Remover
- 10% by volume solution of ArmaKleen™ M-100 BCR

Machine used: Ultrasonic Washer (SK Blackstone 6315)


Temperature used: 160°F

Time required: 4-8 hours

Post Cleaning: Several areas wiped with a clean cotton cloth during fresh water rinse, then parts were air pressure dried

Recommendation to Customer: The ArmaKleen Technical Center recommends using a 100% by volume of ArmaKleen™ Paint and Ink Remover at 160°F in an Ultrasonic Washer for a minimum of 2-4 hours, or using a 10% by volume solution of ArmaKleen™ M-100 BCR at 160°F in an Ultrasonic Washer for a minimum of 6-8 hours

Before Picture

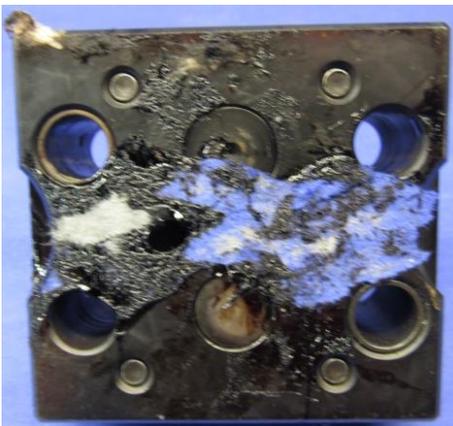

After Picture

