

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Paint & Ink

Industry: Additive Supplier

Segment: 21 – Chemical Manufacturing

Soil: Shop dirt, zinc stearate wax buildup and liquid urethane paint

Substrate: Steel, aluminum, plastic and brass

Description of Part(s): A radiator from a forklift truck.

Customer objective: The customer was looking to improve their cleaning performance and automate their cleaning process.

Cleaner used: 100% by volume solution of ArmaKleen™ Paint and Ink Remover

Machine used: Agitating Immersion Washer - (SK Model 81.8, Graymills T24)

Temperature used: 150°F


Time required: 8 hours

Post Cleaning: Fresh water rinsing followed by air pressure drying.

Recommendation to Customer: The ArmaKleen Technical Center recommends using a 100% by volume solution of ArmaKleen™ Paint and Ink Remover at 150°F an Agitating Immersion Washer for a minimum of 8 hours.

Before Picture

After Picture

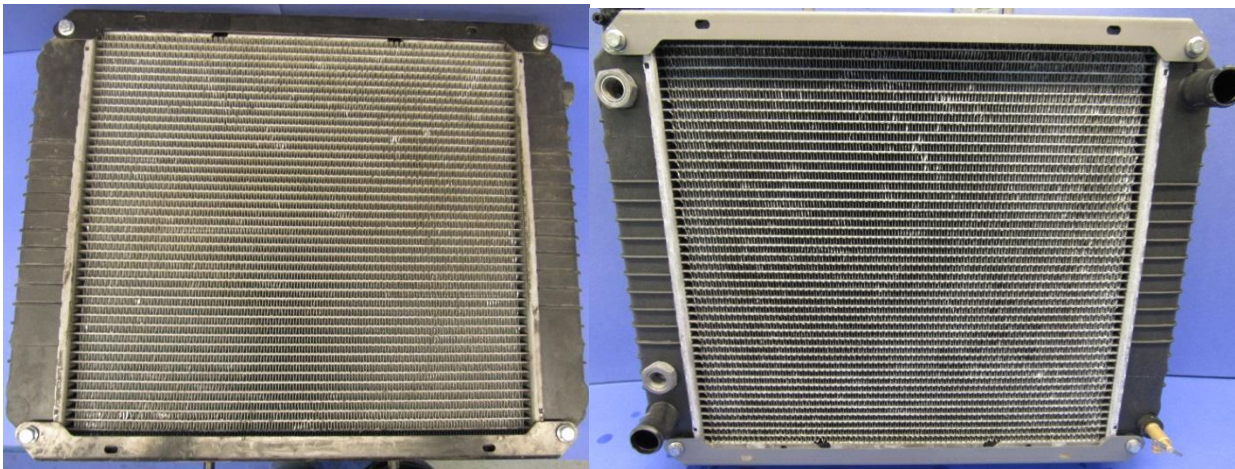

Source: TSR #17-P-031