

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Paint & Ink

Industry: Energy and Process Technologies

Segment: Chemical Manufacturing

Soil: UV ink

Substrate: Stainless steel

Description of Part(s): Rotary stencil sheet

Customer objective: Improve cleaning performance

Cleaner used: 100% by volume solution of ArmaKleen™ Paint & Ink Remover

Machine used: Spray Under Immersion Washer (Graymills T12, Graymills T24, SK Model 81.8 w/ SUI)


Temperature used: 150°F

Time required: 30 minutes

Post Cleaning: Fresh water rinse and air pressure dried

Recommendation to Customer: The ArmaKleen Technical Center recommends using a 100% by volume solution of ArmaKleen™ Paint and Ink Remover at 150°F in a Spray-Under Immersion Washer for a minimum of 30 minutes

Before Picture

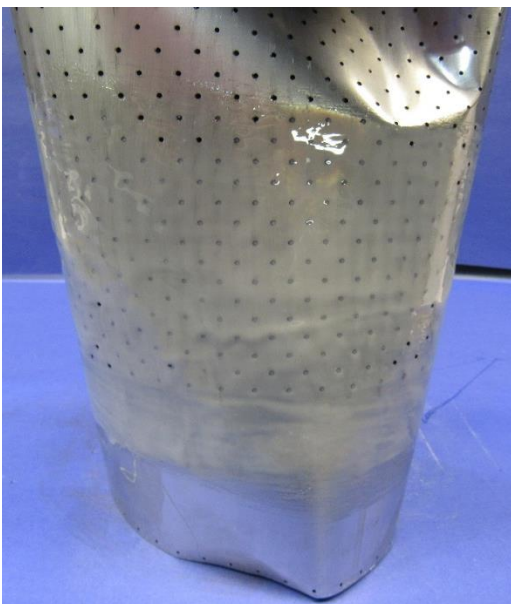

After Picture



Source: TSR #18-P-049