

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Paint & Ink

Industry: Motor repair

Segment: 23 – Mfg – Electrical Equipment & Computers

Soil: Liquid epoxy paint and liquid urethane paint

Substrate: Steel, copper

Description of Part(s): Steel cover with copper wire attachment

Customer objective: The customer was looking to improve their cleaning performance, eliminate hazardous chemicals/waste and reduce VOCs.

Cleaner used: 100% by volume solution of ArmaKleen™ Paint and Ink Remover

Machine used: Agitating Immersion Washer (SK Model 81.8, Graymills T24)

Temperature used: 150°F


Time required: 3 hours

Post Cleaning: Several areas brushed with a stainless steel brush during the fresh water rinse and air pressure dried

Recommendation to Customer: The ArmaKleen Technical Center recommends using a 100% by volume solution of ArmaKleen™ Paint and Ink Remover at 150°F in an Agitating Immersion Washer for a minimum of 3 hours.

Before Picture

After Picture

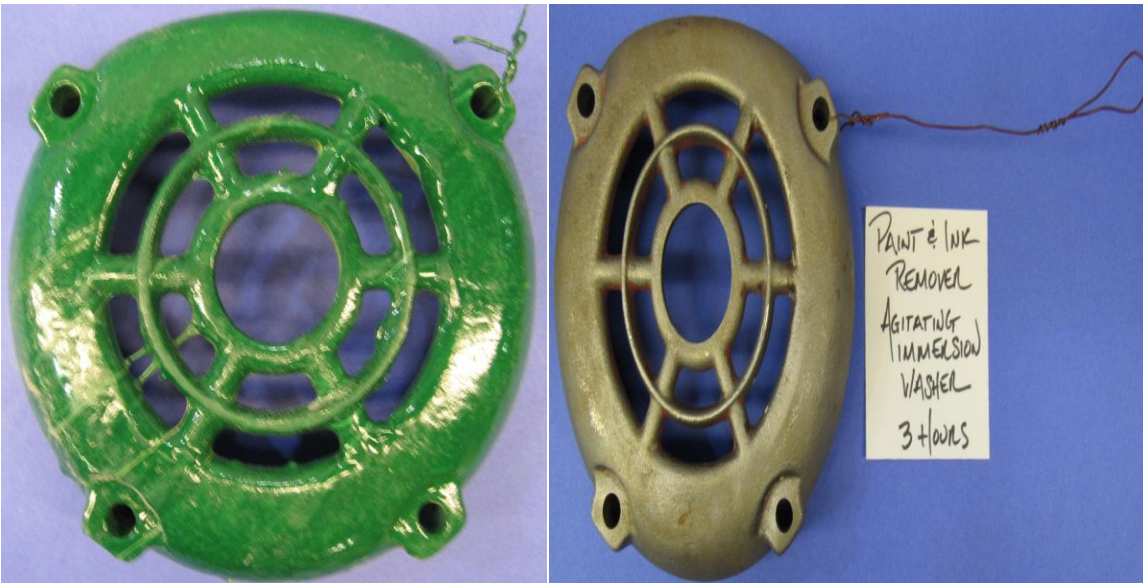

Source: TSR #17-P-004