

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Paint & Ink

Industry: Electrical Maintenance

Segment: 23 Mfg – Electrical Equipment & Computers

Soil: Rust oxides and polyester powder coat paint

Substrate: Steel

Description of Part(s): Steel bracket

Customer objective: The customer was looking to clean mixed metals together as well as stripping the part down to bare metal.

Cleaner used: 100% by volume solution of ArmaKleen™ Paint and Ink Remover

Machine used: Spray Under Immersion Washer (Graymills T12, Graymills T24, SK Model 81.8 w/SUI)

Temperature used: 160°F

Time required: 1 hour


Post Cleaning: Fresh water rinse followed by air pressure drying.

Recommendation to Customer: The ArmaKleen Technical Center recommends using a 100% by volume solution of ArmaKleen™ Paint and Ink Remover at 160°F in a Spray-Under Immersion Washer for a minimum of 1 hour.

Before Picture



After Picture

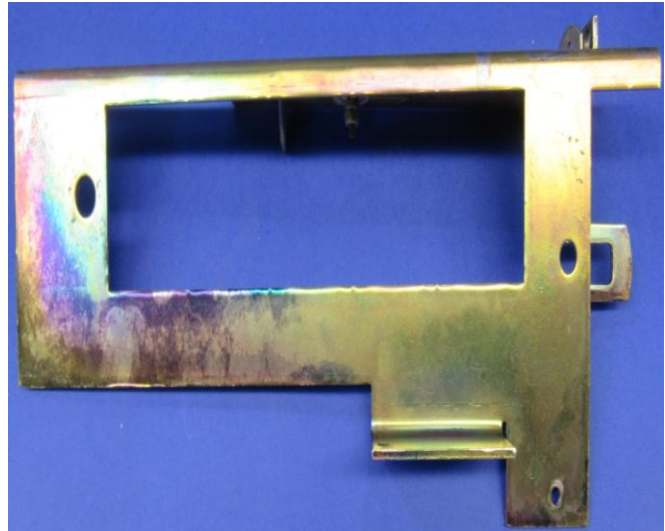

Source: TSR #17-P-040