

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Paint & Ink

Industry: Printing

Segment: 23 Electrical Equipment & Computers Manufacturing

Soil: Phenolic-resin solution (ink)

Substrate: Aluminum, stainless steel, silk-screen masking

Description of Part(s): Printing screen

Customer objective: Improve cleaning performance, automate cleaning process, eliminate hazardous chemicals/waste

Cleaner used: 100% by volume ArmaKleen™ Paint & Ink Remover

Machine used: Spray Under Immersion Washer (Graymills T12, Graymills T24, SK Model 81.8 w/ SUI)


Temperature used: 150°F

Time required: 10 minutes


Post Cleaning: Fresh water rinse and air pressure dried

Recommendation to Customer: The ArmaKleen Technical Center recommends using a 100% by volume solution of ArmaKleen™ Paint and Ink Remover at 150°F in a Spray-Under Immersion Washer (Model 81.8 with attached spray pump) for a minimum of 10 minutes

Before Picture

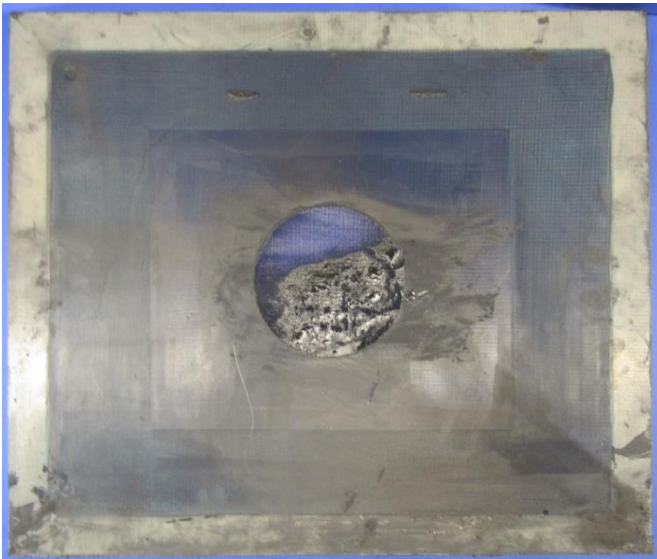

After Picture

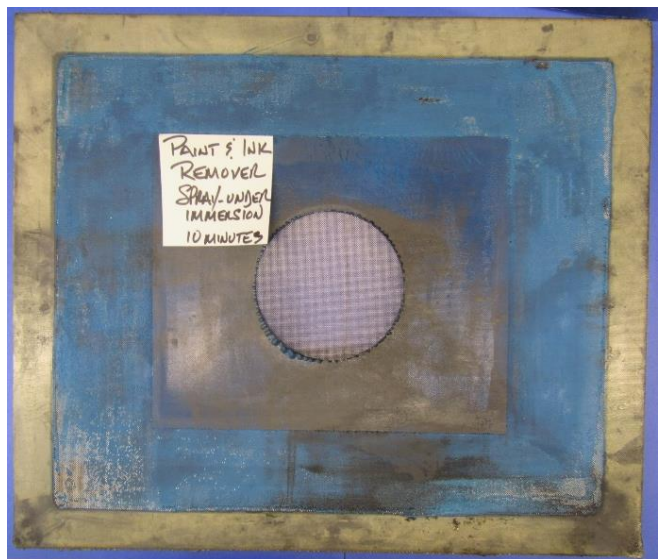

Source: TSR #19-P-012