

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Aqueous

Industry: Production of Hydraulic components

Segment: 26 – Fabricated Metal Products

Soil: Shop dirt, oil, and grime

Substrate: Steel, stainless steel, aluminum and plastic.

Description of Part(s): A connector

Customer objective: The customer was looking to improve their cleaning performance, automate their cleaning process and eliminate hazardous/waste.

Cleaner used: 10% by volume solution of ArmaKleen™ M-HP-2

Machine used: Spray Washer (JRI TL3, JRI FL250, JRI FL500, Better Engineering G-2000)


Temperature used: 120°F

Time required: 1 hour


Post Cleaning: Fresh water rinse followed by air pressure drying

Recommendation to Customer: The ArmaKleen Technical Center recommends using a 10% by volume solution of ArmaKleen™ M-HP-2 at 120°F in a Spray Washer for a minimum of 1+ hours

Before Picture

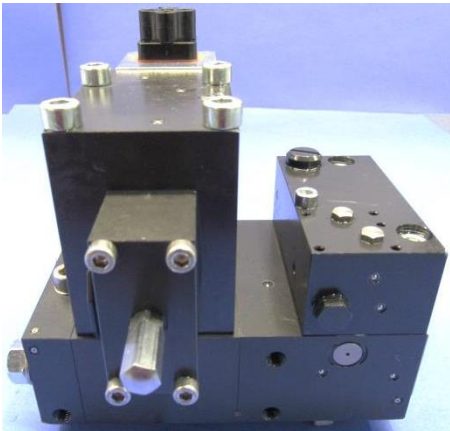

After Picture

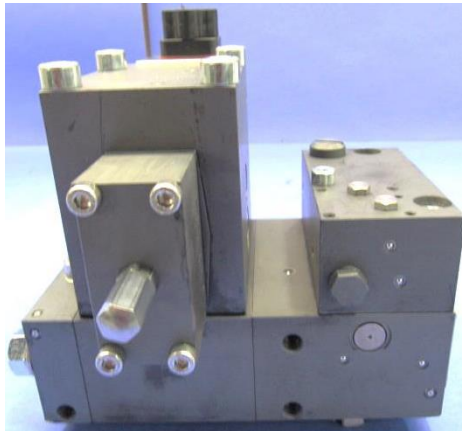

Source: TSR # 16-A-060