

## ***ArmaKleen Technical Service Report Summary***

**Cleaning Trial Type:** Paint & Ink

**Industry:** Coating Manufacturer

**Segment:** 26 – Fabricated Metal Products

**Soil:** Cured liquid epoxy paint

**Substrate:** Steel

**Description of Part(s):** steel bar

**Customer objective:** The customer was looking to improve their cleaning performance, eliminate hazardous chemicals/waste and reduce VOCs.

**Cleaner used:** 100% by volume solution of ArmaKleen™ Paint and Ink Remover

**Machine used:** Agitated Immersion Spray Washer (SK Model 81.8, Graymills T24)


**Temperature used:** 150°F

**Time required:** 6 hours

**Post Cleaning:** Fresh water rinse followed by air pressure drying

**Recommendation to Customer:** The ArmaKleen Technical Center recommends using a 100% by volume solution of ArmaKleen™ Paint and Ink Remover at 150°F in an Agitating Immersion Washer for a minimum of 6 hours.

**Before Picture**

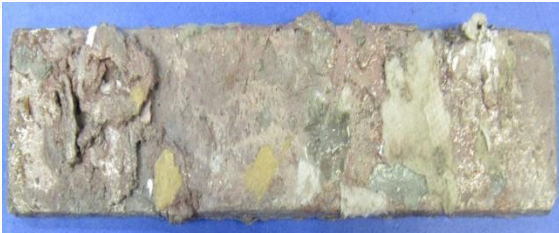

**After Picture**



**Source:** TSR #17-P-130