

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Paint & Ink

Industry: Metal Fabrication

Segment: Fabricated Metal Products

Soil: Epoxy powder coat paint

Substrate: Steel

Description of Part(s): Paint hooks

Customer objective: Improve cleaning performance, reduce rework and reject rate, reduce cleaning costs

Cleaner used: 100% by volume solution of ArmaKleen™ Paint & Ink Remover

Machine used: Spray Under Immersion Washer (Graymills T12, Graymills T24, SK Model 81.8 w/ SUI)


Temperature used: 160°F

Time required: 4 hours

Post Cleaning: Fresh water rinse and air pressure dried

Recommendation to Customer: The ArmaKleen Technical Center recommends using a 100% by volume solution of ArmaKleen™ Paint and Ink Remover at 160°F in a Spray-Under Immersion Washer

Before Picture

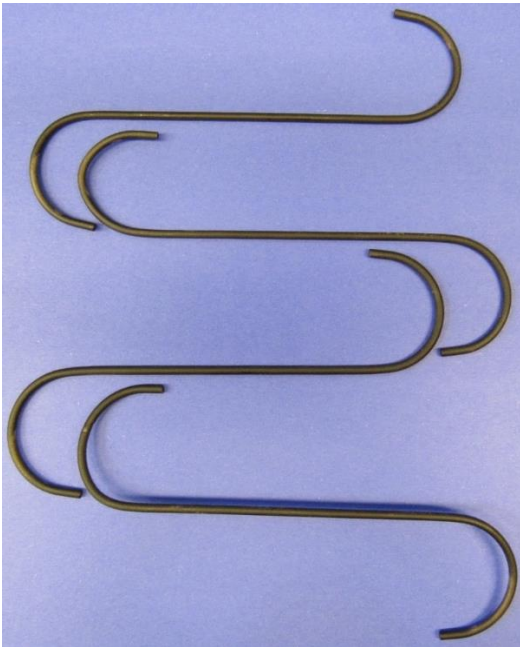

After Picture

