

## ***ArmaKleen Technical Service Report Summary***

**Cleaning Trial Type:** Paint removal

**Industry:** Industrial painting

**Segment:** 26 Fabricated Metal Products

**Soil:** Acrylic powder coat paint, epoxy powder coat paint

**Substrate:** Rubber

**Description of Part(s):** Rubber stoppers and caps

**Customer objective:** The customer was looking to improve their cleaning performance and automate their cleaning process.

**Cleaner used:** 100% by volume ArmaKleen™ Paint and Ink Remover

**Machine used:** Spray Under Immersion Washer (Graymills T12, Graymills T24, SK 81.8 w/SUI)

**Temperature used:** 160°F

**Time required:** 1.5 to 4 hours


**Post Cleaning:** Fresh water rinse followed by air pressure drying.

**Recommendation to Customer:** The ArmaKleen Technical Center recommended using 100% by volume ArmaKleen™ Paint and Ink Remover at 160°F in a Spray Under Immersion Washer for a minimum of 1.5 to 4 hours.

### **Before Picture**



### **After Pictures**

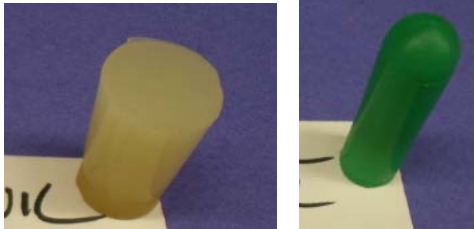

**Source:** TSR #13-P-140