

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Paint & Ink

Industry: Caster Manufacturing

Segment: Fabricated Metals

Soil: cured acrylic powder coat paint, epoxy powder coat paint, hybrid powder coat paint, polyester powder coat paint

Substrate: Steel

Description of Part(s): Paint hooks

Customer objective: Improve cleaning performance, automate cleaning process

Cleaner used: 100% by volume solution of ArmaKleen™ Paint & Ink Remover

Machine used: Agitating Immersion Washer (Graymills T12, Graymills T24, SK Model 81.8)


Temperature used: 150°F

Time required: 36 hours


Post Cleaning: Fresh water rinse and air pressure dried

Recommendation to Customer: The ArmaKleen Technical Center recommends using a 100% by volume solution of ArmaKleen™ Paint and Ink Remover at 150°F in an Agitating Immersion Washer for a minimum of 36 hours

Before Picture

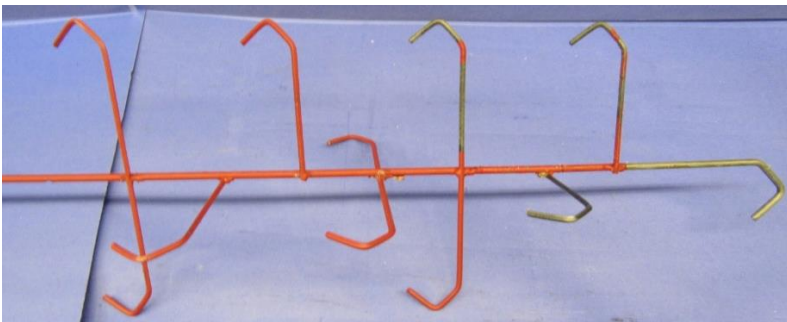

After Picture

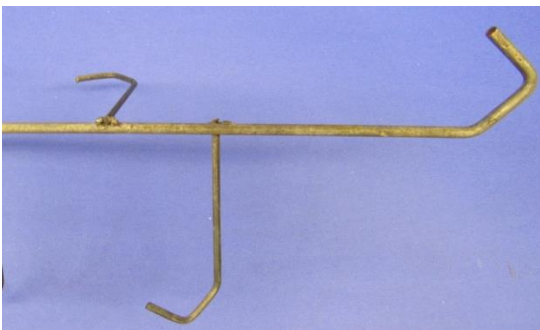

Source: TSR #18-P-135