

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Paint & Ink

Industry: OEM parts manufacturer

Segment: 28 – Mfg – Machine (incl Medical)

Soil: unknown glue/adhesive

Substrate: Stainless Steel

Description of Part(s): Thirty-two martensitic stainless steel caps (#430 stainless steel-magnetic)

Customer objective: The customer was looking to eliminate hazardous chemicals/waste and recover scrap parts

Cleaner used: 100% by volume solution of ArmaKleen™ Paint and Ink Remover

Machine used:

- Spray Under Immersion Washer (Graymills T12, Graymills T24, SK Model 81.8 w/SUI)
- Ultrasonic Washer (SK Blackstone model 6315)


Temperature used: 160°F

Time required: 2 hours

Post Cleaning: Fresh rinse followed by air pressure drying

Recommendation to Customer: The ArmaKleen Technical Center recommends using a 100% by volume solution of ArmaKleen™ Paint and Ink Remover at 160°F in a Spray-Under Immersion Washer for a minimum of 2 hours.

Before Picture

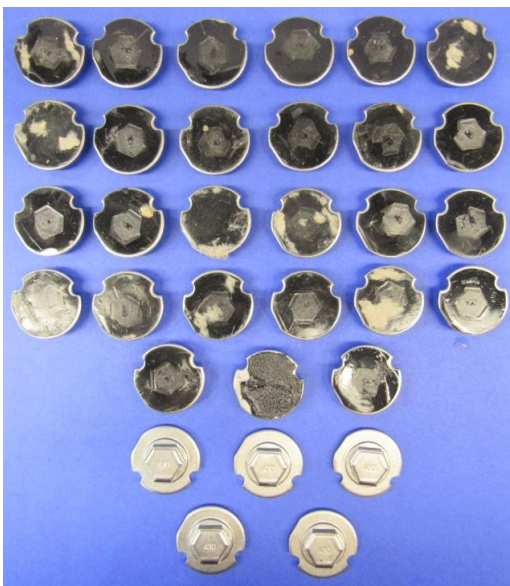

After Picture



Source: TSR #17-P-066