

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Paint & Ink

Industry: Lawn mower manufacturer

Segment: 28 – Mfg – Machine (incl Medical)

Soil: urethane powder coat paint

Substrate: Steel

Description of Part(s): 2 steel plates/brackets and one steel cover

Customer objective: The customer was looking to improve their cleaning performance and reduce rework and reject rate.

Cleaner used: 100% by volume solution of ArmaKleen™ Paint and Ink Remover

Machine used:

- Agitating Immersion (SK Model 81.8, Graymills T24)
- Spray Under Immersion Washer (Graymills T12, Graymills T24, SK Model 81.8 w/SUI)

Temperature used: 160°F

Time required: 2 hours


Post Cleaning: Fresh rinse followed by air pressure drying

Recommendation to Customer: The ArmaKleen Technical Center recommends using a 100% by volume solution of ArmaKleen™ Paint and Ink Remover at 160°F in an Agitating Immersion Washer or in a Spray-Under Immersion Washer at 160°F for a minimum of 2 hours.

Before Picture



After Picture

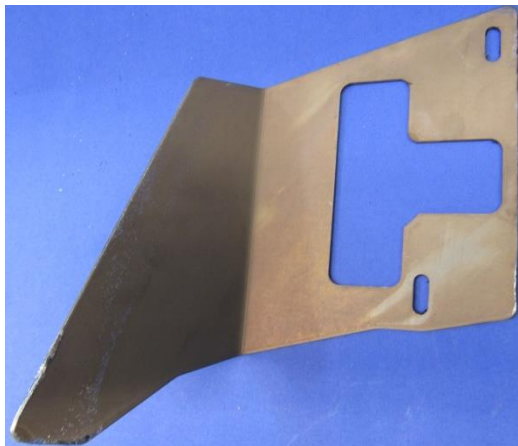

Source: TSR #17-P-114