

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Paint & Ink

Industry: Brush Manufacturer

Segment: 28 – Machine (incl Medical)

Soil: An unknown glue/adhesive

Substrate: Nylon, Stainless Steel

Description of Part(s): an assortment of nylon bristle brushes on stainless steel stems

Customer objective: The customer was looking to improve their cleaning performance, reduce rework and reject rate, reduce their cleaning costs and eliminate hazardous chemicals/waste.

Cleaner used: 100% by volume solution of ArmaKleen™ Paint and Ink Remover

Machine used: Ultrasonic Washer (SK Blackstone model 6315)


Temperature used: 160°F

Time required: 30 minutes to 2 hours

Post Cleaning: Fresh rinse followed by air pressure drying

Recommendation to Customer: The ArmaKleen Technical Center recommends using a 100% by volume solution of ArmaKleen™ Paint and Ink Remover at 160°F in an Ultrasonic Washer for a minimum of 30 minutes to 2 hours.

Before Picture

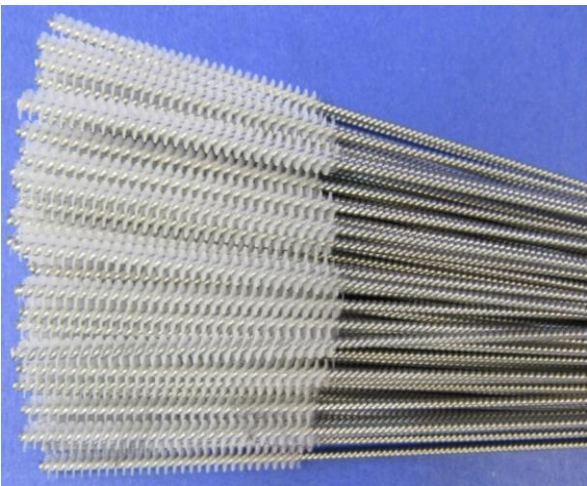

After Picture



Source: TSR #17-P-116