

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Aqueous

Industry: Manufacturing

Segment: 31 – Primary Metal Manufacturing

Soil: Hard water scale build-up

Substrate: Stainless steel, rubber

Description of Part(s): Stainless steel plate with rubber gasket

Customer objective: The customer was looking to improve their cleaning performance.

Cleaner used: 10% by volume ArmaKleen™ Rust Remover

Machine used: Agitating Immersion Washer (SK 81.8, Graymills T12, Graymills T24)


Temperature used: 90°F

Time required: 24 hours


Post Cleaning: Fresh water rinse followed by air pressure drying.

Recommendation to Customer: The ArmaKleen Technical Center recommended using 10% by volume ArmaKleen™ Rust Remover at 90°F in an Agitating Immersion Washer for a minimum of 24 hours.

Before Picture

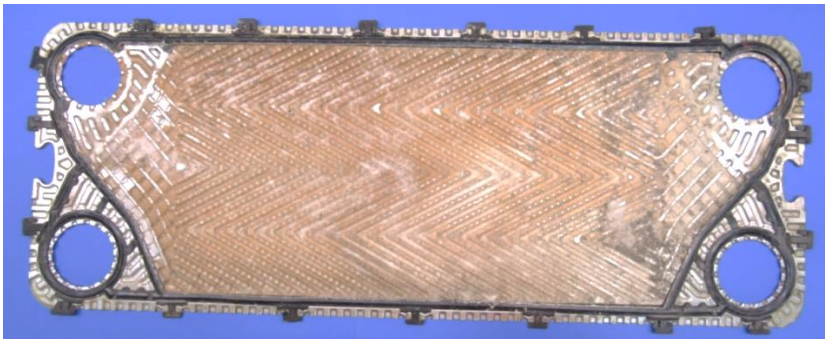

After Picture

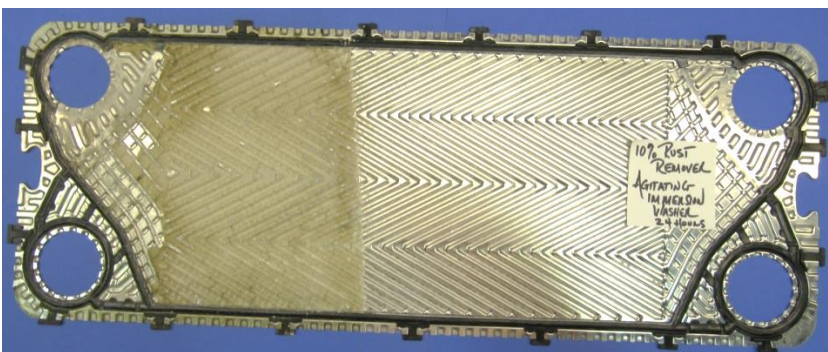

Source: TSR #15-A-164