

## ***ArmaKleen Technical Service Report Summary***

**Cleaning Trial Type:** Paint & Ink

**Industry:** Consulting

**Segment:** Non-Metal (Plastic, Rubber, & Glass) Manufacturing

**Soil:** UV ink, glue/adhesive

**Substrate:** Aluminum

**Description of Part(s):** Frame

**Customer objective:** Improve cleaning performance, automate cleaning process, eliminate hazardous chemicals/waste

**Cleaner used:** 100% by volume solution of ArmaKleen™ Paint & Ink Remover

**Machine used:** Agitating Immersion Washer (Graymills T12, Graymills T24, SK Model 81.8)


**Temperature used:** 150°F

**Time required:** 2 hours

**Post Cleaning:** Areas were brushed with a soft nylon bristle brush during the fresh water rinse and air pressure dried

**Recommendation to Customer:** The ArmaKleen Technical Center recommends using a 100% by volume solution of ArmaKleen™ Paint and Ink Remover at 150°F in an Agitating Immersion Washer for a minimum of 2 hours

**Before Picture**

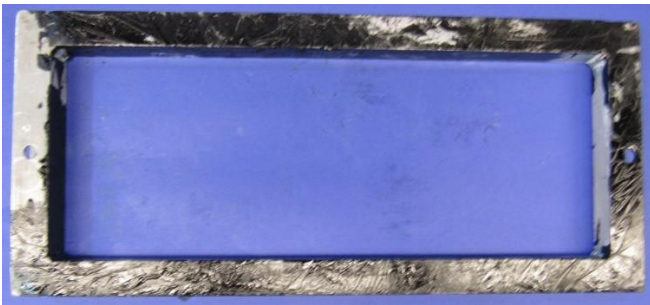

**After Picture**



**Source:** TSR #18-P-058