

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Aqueous

Industry: Packaging and Handling

Segment: 34 Non-Metal (Plastic, Rubber, Glass) Manufacturing

Soil: Oil, grime

Substrate: Steel/iron, copper/brass

Description of Part(s): Small and medium fittings and parts

Customer objective: Automate cleaning process, reduce cleaning costs, eliminate hazardous chemicals/waste, eliminate immersion washer

Cleaner used: 5% by volume ArmaKleen™ BIO-24

Machine used: Spray Under Immersion Washer (Graymills T12, Graymills T24, SK Model 81.8 w/ SUI)

Temperature used: 160°F

Time required: 1 hour


Post Cleaning: Fresh water rinse and air pressure dried

Recommendation to Customer: The ArmaKleen Technical Center recommends using a 5% by volume of ArmaKleen™Bio24 at 160°F in a Spray Under Immersion Washer for a minimum of 1 hour

Before Picture



After Picture

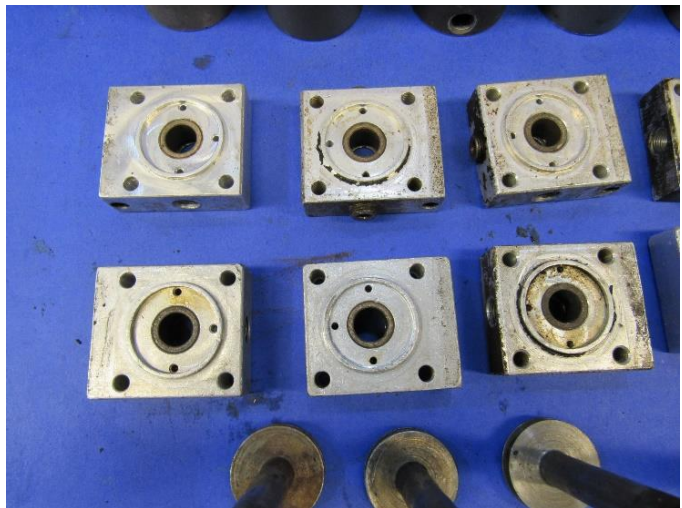

Source: TSR #19-A-082