

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Wax Removal

Industry: Ceramics manufacturing

Segment: 34 – Manufacturing – Non-metal (Plastic, Rubber, Glass)

Soil: Wax

Substrate: Glass

Description of Part(s): Disks

Customer objective: The customer was looking to improve their cleaning performance and reduce rework and reject rate.

Cleaner used: 100% by volume ArmaKleen™ Paint and Ink Remover

Machine used: Spray Under Immersion Washer (Graymills T12, Graymills T24, SK 81.8 w/SUI)


Temperature used: 150°F

Time required: 15 minutes to 3.5 hours


Post Cleaning: Fresh water rinse followed by air pressure drying.

Recommendation to Customer: The ArmaKleen Technical Center recommended using 100% by volume ArmaKleen™ Paint and Ink Remover at 150°F in a Spray Under Immersion Washer for a minimum of 3.5 hours.

Before Picture

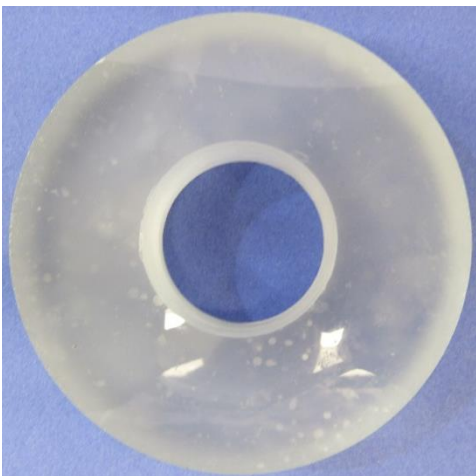

After Picture

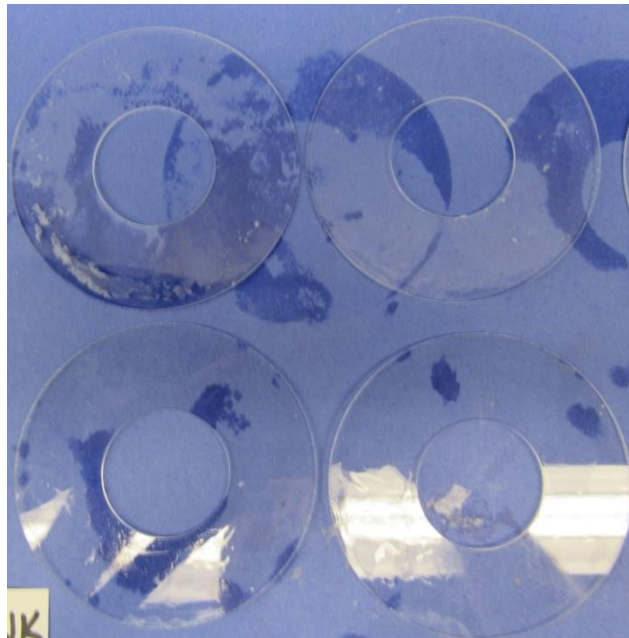

Source: TSR #15-P-187