

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Aqueous

Industry: Printing Label Manufacturer

Segment: 42 - Printing

Soil: Uncured UV ink

Substrate: Stainless steel, Aluminum

Description of Part(s): stainless steel ink tray with aluminum brackets

Customer objective: The customer was looking to improve their cleaning performance and automate their cleaning process.

Cleaner used: 5% by volume solution of ArmaKleen™ 4 in 1 Cleaner

Machine used: Spray Washer (JRI TL3, JRI FL250, JRI FL500, Better Engineering G-2000)


Temperature used: 160°F

Time required: 15 minutes


Post Cleaning: Fresh water rinse and air pressure dried

Recommendation to Customer: The ArmaKleen Technical Center recommends using a 5% by volume solution of ArmaKleen™ 4 in 1 Cleaner at 160°F in a Spray Washer for a minimum of 15 minutes.

Before Picture

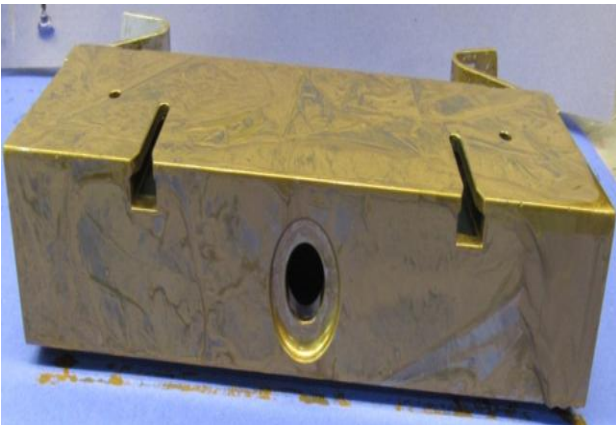

After Picture

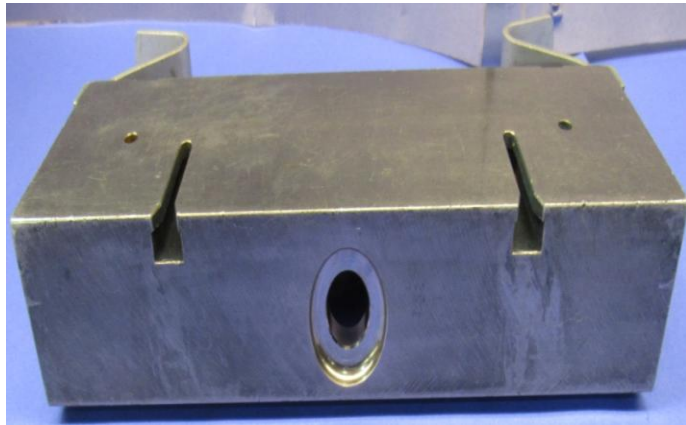

Source: TSR #17-A-013