

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Aqueous and Paint & Ink

Industry: Nuclear energy

Segment: 67 – Eng & Consult – Civil/Heavy Construction

Soil: Shop dirt, cutting fluids, nuclear marker ink

Substrate: Stainless steel

Description of Part(s): Panels

Customer objective: Improve cleaning performance

Cleaner used:

- 5% by volume solution of ArmaKleen™ 4 in 1 Cleaner
- 100% by volume solution of ArmaKleen™ Paint & Ink Remover

Machine used: Agitating Immersion (SK Model 81.8, Graymills T12, Graymills T24)


Temperature used: 150°F

Time required: 1-4 hours

Post Cleaning: Some parts were wiped with a clean cotton cloth during fresh water rinse, then all parts were air pressure dried

Recommendation to Customer: The ArmaKleen Technical Center recommends using a 100% by volume solution of ArmaKleen™ Paint and Ink Remover at 150°F in an Agitating Immersion Washer (Model 81.8) for a minimum of 1 hour

Before Picture

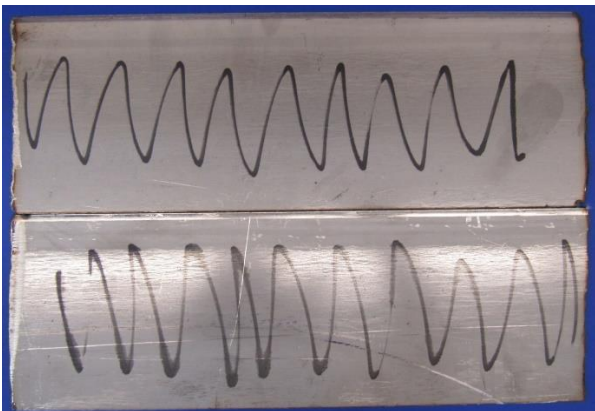

After Picture

