

## ***ArmaKleen Technical Service Report Summary***

**Cleaning Trial Type:** Aqueous

**Industry:** Ventilation

**Segment:** Entertainment & Recreational Services

**Soil:** Material from a Smog Hog Filtration System

**Substrate:** Aluminum, glass, plastic

**Description of Part(s):** Filters

**Customer objective:** Improve cleaning performance, automate cleaning process

**Cleaner used:** 5% by volume solution of ArmaKleen™ 4 in 1 Cleaner

**Machine used:** Spray Under Immersion Washer (Graymills T12, Graymills T24, SK Model 81.8 w/ SUI)


**Temperature used:** 150°F

**Time required:** 2 hours


**Post Cleaning:** Fresh water rinse and air pressure dried

**Recommendation to Customer:** The ArmaKleen Technical Center recommends using a 5% by volume solution of ArmaKleen™ 4 in 1 Cleaner at 150°F in a Spray-Under Immersion Washer (Model 81.8 with attached spray pump-*agitation feature not activated*) for a minimum of 2 hours.

**Before Picture**

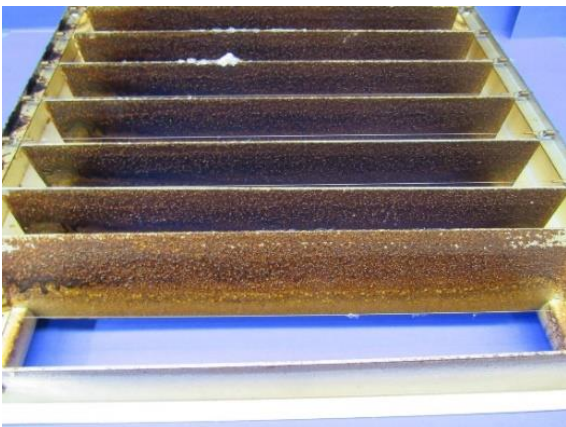

**After Picture**

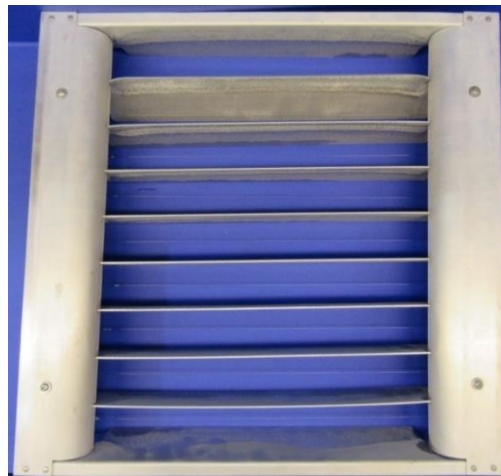

**Source:** TSR #18-A-008