

ArmaKleen Technical Service Report Summary

Cleaning Trial Type: Aqueous

Industry: OEM vinyl molding

Segment: 86 Hotels, Camps, Parks, Clubs & Personal Services

Soil: Shop dirt, oil, wax

Substrate: Steel, copper, brass, aluminum and plastic

Description of Part(s): Steel, copper and brass calibrator mold with an aluminum cover and plastic handles.

Customer objective: The customer was looking to improve their cleaning performance, automate their cleaning process and reduce their cleaning costs.

Cleaner used:

- 5% by volume ArmaKleen™ 4 in 1 Cleaner
- 100% by volume ArmaKleen™ Paint and Ink Remover

Machine used: Ultrasonic Washer (SK 6315)


Temperature used: 160°F

Time required: 20 minutes

Post Cleaning: Fresh water rinse followed by air pressure drying.

Recommendation to Customer: The ArmaKleen Technical Center recommended using 5% by volume ArmaKleen™ 4 in 1 Cleaner at 160°F in an Ultrasonic Washer for a minimum of 20 – 30 minutes.

Before Picture

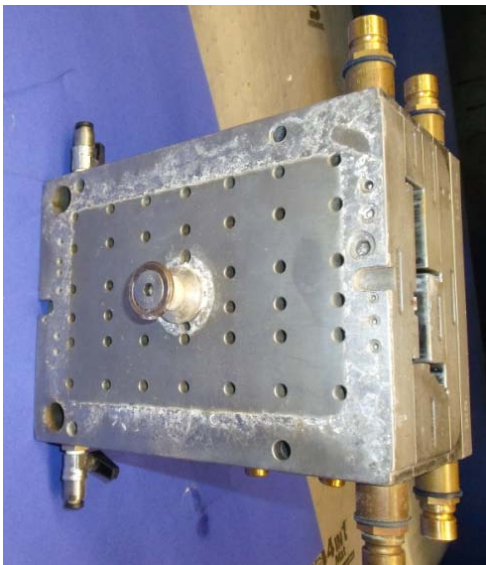

After Picture



Source: TSR #13-AP-101